

ALL-LITE



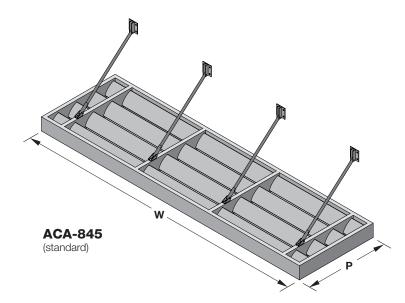

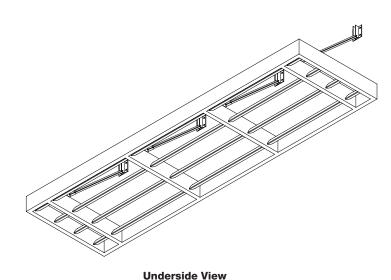

The ACA-845 extruded aluminum canopy is designed to provide distinctive style to a building's exterior while keeping the building cool and saving energy by reducing glare and thermal load.

Standard Construction

Material: Mill finish aluminum

Frame Member: $8" \text{ tall } \times 2" \text{ deep } (203 \times 51) \text{ channel}$

Blades: $45^{\circ} \times 0.110^{\circ}$ (2.8) thick airfoil style

Tieback Shroud: $1.3" \text{ tall } \times 1.08" \text{ wide } \times 0.085" \text{ thick}$ $(33 \times 27 \times 2) \text{ pipe}$

Mounting Rail: Hidden

Minimum Size: 36" wide × 18" projection (914 × 457)

Maximum Size: Single section: 120" × 48" (3048 × 1219) Multiple section: Unlimited width × 48" (1219) Maximum shroud spacing is 96" (2438). Overhang is 12" (305) past shroud on each end.

Options

Factory finish:


- High Performance Fluoropolymer
- Baked Enamel
- Prime Coat
- Installation Hardware
 - Anchors for various building conditions

Ratings

Design Load: 50 psf downward / 30 psf upward


5 year warranty

NOTE: Dimensions in parentheses () are millimeters. Information is subject to change without notice or obligation.



Attributes



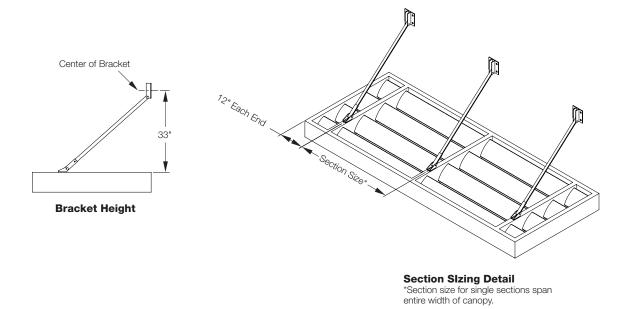

ALL-LITE ACA-845 2 of 2, November, 2023