
## **ALL-LITE**

## PA-LS

Pre-Assembled Louver Sections

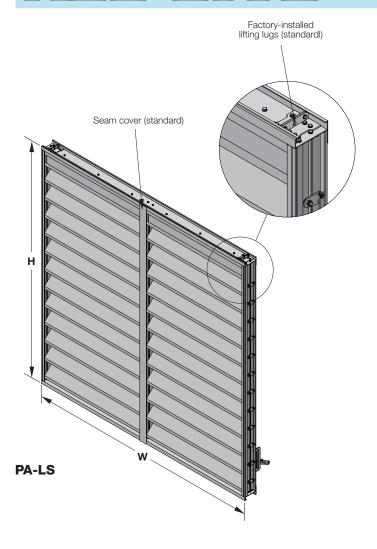

Pottorff offers the option to ship pairs of louver sections pre-assembled together in a common frame. This arrangement reduces installation time and cost (particularly on multi-story buildings) by halving the total number of assemblies that must be lifted into place. Merging pairs of sections is an available option on most Pottorff operable and combination louver models (hurricanerated and backdraft models are excluded). For these paired louver assemblies, Pottorff includes factory-installed lifting lugs to ease installation and avoid damage to the louvers.

## **Standard Construction**

Material: Extruded aluminumFrame: 0.081"(2) thick channelFinish: To match louver finish

Mullion: Visible mullion with pre-installed seam cover

**Lifting lugs:** Factory installed

**Maximum assembly size:**  $120" \text{ W} \times 96" \text{ H} (3048 \times 2438)$ 

96" W × 120" H (2438 × 3048)

## **Options**

■ Flange or frame closure options ordered for louvers will be installed on the perimeter frame



**NOTE:** Dimensions in parentheses () are millimeters. Information is subject to change without notice or obligation.