


# ALL-LITE

## EDV-545-MD

Extruded Aluminum Louver  
5-3/8" deep • J-blade w/ Vertical Blade rear section

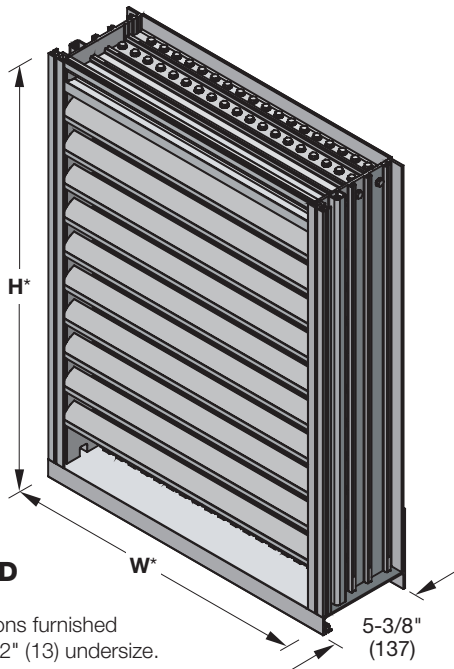

### EDV-545-MD

(standard)

\*Louver dimensions furnished approximately 1/2" (13) undersize.

## Ratings

**Free Area:** [48" × 48" (1219 × 1219) unit]: 8.03 ft<sup>2</sup> (0.75 m<sup>2</sup>)  
50.2%

### Performance @ Beginning Point of Water Penetration

**Free Area Velocity:** 1,250 fpm (6.35 m/s)

**Air Volume Delivered:** 10,038 cfm (4.74 m<sup>3</sup>/s)

**Pressure Loss:** 0.55 in.wg. (136 Pa)

**Velocity @ 0.15 in.wg. Pressure Loss:** 666 fpm (3.38 m/s)

**AMCA 540 (impact resistant, Basic Protection - Level D and Enhanced Protection - Level E) listed**

**AMCA 550 (high velocity rain resistant) listed**

**Miami Dade County:** NOA No. 25-0603.01 (Expires 7/3/30)  
Approved to FBC TAS201-94, TAS202-94, TAS203-94 and TAS100(A)-95

**Florida Building Code Approval (2023-FBC):** No. 47624

**Texas Department of Insurance Listed (TDI)**

**Design Load:** 100 psf



### Certified Ratings:

All-Lite certifies that the model EDV-545-MD shown herein is licensed to bear the AMCA seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to air performance, water penetration and wind-driven rain ratings.



The EDV-545-MD dual-module louver is engineered and tested to withstand extreme loads, debris impact, and cyclic fatigue associated with the severe weather effects of hurricanes (Miami-Dade County approval NOA No. 25-0603.01) while maintaining maximum water infiltration resistance at a minimum louver depth. The front (exterior) side of the louver features horizontal J-style blades for a pleasant architectural appearance. The back (interior) side features vertical chevron blades which provide superior resistance to wind-driven rain. For installation, the EDV-545-MD offers a continuous angle. The EDV-545-MD is AMCA 540 and 550 listed, making it ideally suited for use in hurricane-prone and wind-borne debris regions as per the International Building Code.

## Standard Construction

**Material:** Mill finish 6005A-T6 extruded aluminum

**Frame:** 5-3/8" deep × 0.081" thick (137 × 2) channel

### Blades

**Rear:** 45° × 0.05" (1.3) thick vertical chevron style

**Front:** 45° × 0.08" (2) thick horizontal J style

**Screen:** 1/2" × 0.063" (12.7 × 1.6) expanded and flattened aluminum

**Mullion:** Visible

**Installation Hardware:** Continuous angles

**Minimum Size:** 12" × 12" (305 × 305)

### Maximum Size:

Single section: 60" × 96" (1524 × 2438)

Multiple section: Unlimited width × 96" (2438)

**Shipping Weight (approximate):** 10.3 lb/ft<sup>2</sup> (50 kg/m<sup>2</sup>)

## Options

### ■ Factory finish:

- High Performance Fluoropolymer ■ Prime Coat
- Baked Enamel ■ Clear Anodize ■ Integral Color Anodize

### ■ Frame Options:

- 1-1/2" (38) flange frame

### ■ Alternate bird or insect screens

### ■ Insulated or non-insulated blank-off panels

### ■ Filter racks

### ■ Head and/or sill flashing

### ■ Burglar bars

5 year  
warranty

**NOTE:** Dimensions in parentheses ( ) are millimeters.  
Information is subject to change without notice or obligation.

# PERFORMANCE

## EDV-545-MD

Extruded Aluminum Louver  
5-3/8" deep • J-blade w/ Vertical Blade rear section

### Free Area (ft<sup>2</sup>)

		Width (Inches)								
		12	18	24	30	36	42	48	54	60
Height (Inches)	12	0.22	0.36	0.49	0.63	0.76	0.90	1.03	1.17	1.30
	18	0.48	0.76	1.05	1.33	1.62	1.90	2.19	2.47	2.76
	24	0.73	1.17	1.61	2.05	2.49	2.93	3.37	3.81	4.25
	30	0.99	1.59	2.18	2.78	3.37	3.97	4.56	5.16	5.75
	36	1.25	2.00	2.75	3.50	4.25	5.00	5.75	6.50	7.25
	42	1.50	2.41	3.31	4.21	5.11	6.02	6.92	7.82	8.72
	48	1.75	2.79	3.84	4.89	5.93	6.98	8.03	9.08	10.12
	54	1.99	3.19	4.38	5.58	6.78	7.97	9.17	10.36	11.56
	60	2.23	3.58	4.92	6.26	7.60	8.94	10.28	11.62	12.96
	66	2.49	3.98	5.48	6.97	8.47	9.96	11.45	12.95	14.44
	72	2.75	4.40	6.05	7.69	9.34	10.99	12.64	14.29	15.94
	78	3.01	4.81	6.61	8.42	10.22	12.02	13.83	15.63	17.43
	84	3.26	5.22	7.18	9.14	11.10	13.06	15.02	16.97	18.93
	90	3.51	5.62	7.73	9.84	11.95	14.05	16.16	18.27	20.38
	96	3.76	6.02	8.27	10.53	12.79	15.04	17.30	19.56	21.81



#### Certified Ratings:

All-Lite certifies that the model EDV-545-MD shown herein is licensed to bear the AMCA seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to air performance, water penetration and wind-driven rain ratings.



**HIGH VELOCITY RAIN  
RESISTANT WITH BLADES  
FULLY OPEN AND  
IMPACT RESISTANT LOUVER  
Enhanced Protection Level E**

See [www.AMCA.org](http://www.AMCA.org) for all certified or listed products

This label does not signify  
AMCA airflow performance  
certification.


#### Listings:

All-Lite certifies that the model EDV-545-MD shown herein is approved to bear the AMCA International Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA publications and comply with the requirements of the AMCA International Listing Label program. The AMCA International Listing Label applies to pressure cycle tested windborne debris impact resistant louvers rated for 'Enhanced Protection' and +/- 100 psf with a minimum blade span of 12" and a maximum unsupported blade span of 60", and to high velocity wind driven rain (HVWDR) resistant louvers tested in the fully open position that permits airflow through the louver.


## Water Penetration

AMCA defines the beginning point of water penetration as the free area velocity at the intersection of a simple linear regression of test data and the line of 0.01 ounces of water per square foot of free area measured through a 48" x 48" louver during a 15 minute period. The AMCA water penetration test provides a method for comparing louver models and designs as to their efficiency in resisting the penetration of rainfall under specific lab conditions. We recommend that intake louvers are selected with a reasonable margin of safety below the beginning point of water penetration in order to avoid unwanted penetration during severe storm conditions.

**Beginning Point of Water Penetration = 1,250 fpm**

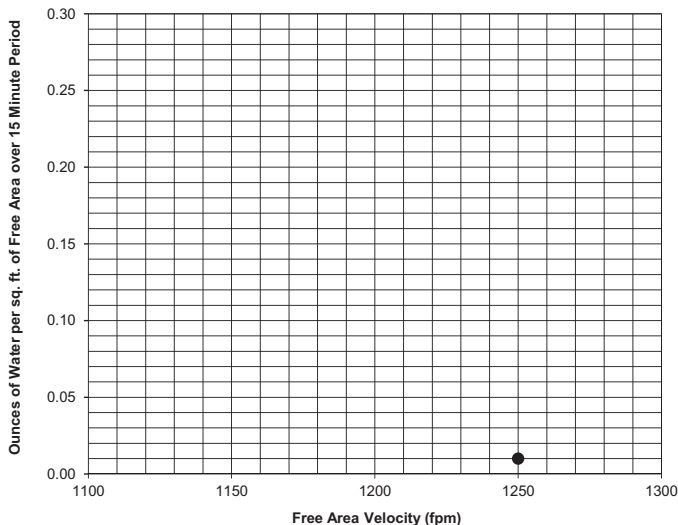

## Pressure Loss

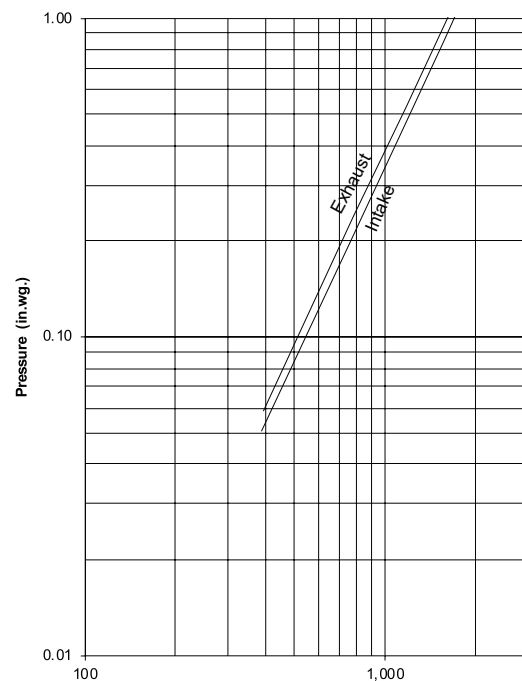

Louver Test Size = 48" x 48" (1219 x 1219)  
Pressure loss tested in accordance with Figure 5.5 of AMCA  
Standard 500-L. Data corrected to standard air density.

# PERFORMANCE

## EDV-545-MD

Extruded Aluminum Louver  
5-3/8" deep • J-blade w/ Vertical Blade rear section

### Wind Driven Rain Performance - AMCA 500L Wind-Driven Rain Test

Wind Velocity	Rainfall	Airflow cfm (m³/s)	Core Velocity¹ fpm (m/s)	Free Area Velocity² fpm (m/s)	Effectiveness Ratio	Wind-Driven Rain Penetration Class
29 mph	3 in/hr	10,591 (5.0)	984 (5.0)	1,789 (9.1)	100%	A
50 mph	8 in/hr	10,600 (5.0)	985 (5.0)	1,791 (9.1)	99.8%	A

#### NOTE:


1. Core area is the open area of the louver face (face area less louver frame). Core velocity is the airflow divided by core area. Test louver core area is 10.77 ft² (1 m²).

2. Free area velocity is the airflow divided by free area. Test louver free area is 5.9 ft² (0.55 m²).

#### Wind Driven Rain

Class	Effectiveness
A	99% and above
B	95% to 98.9%
C	80% to 94.9%
D	below 80%

### Attributes

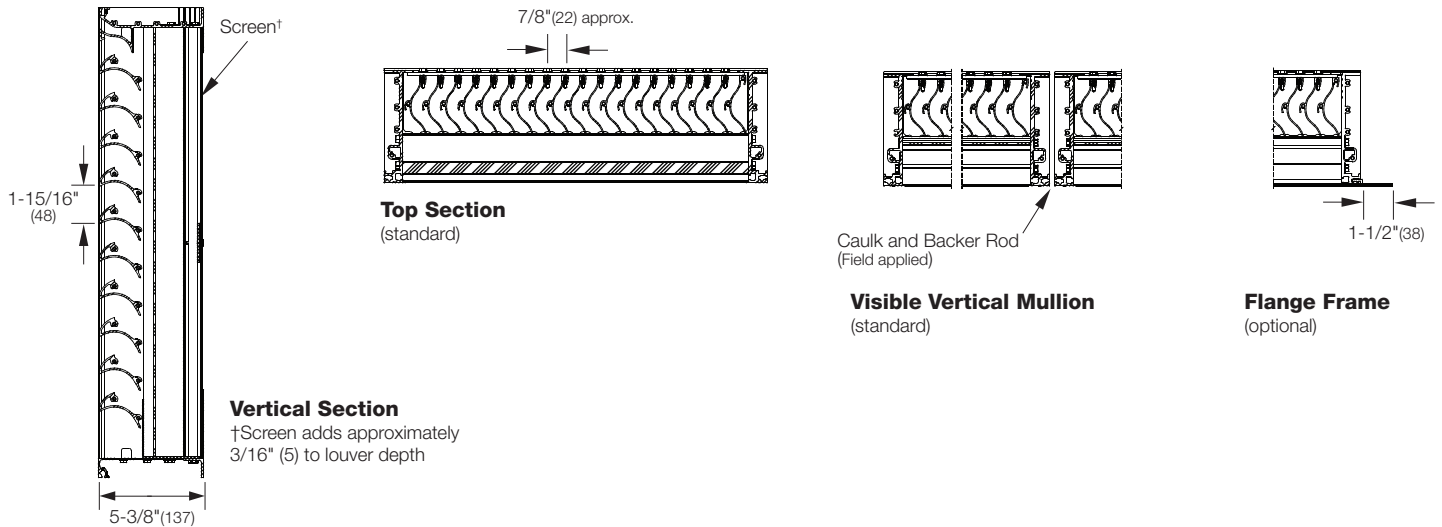

### Supplemental Options

