


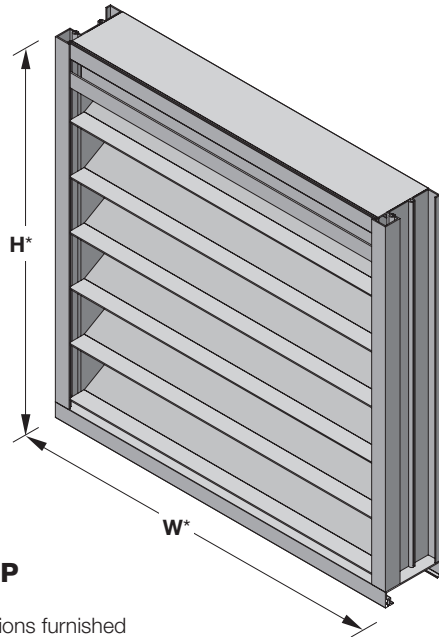

EFE-430-HP

(standard)

*Louver dimensions furnished approximately 1/2" (13) undersize.

The EFE-430-HP extruded aluminum louver is optimized for exhaust airflow in situations where sight protection is not a primary concern. The EFE-430-HP incorporates a drainable frame with low profile J-style blades that offer very high free area and reduced pressure loss. The EFE-430-HP is available in a wide array of anodized and painted finishes, including custom color matching.

Standard Construction

Material: Mill finish 6063 extruded aluminum

Frame: 4" deep × 0.081" thick (102 × 2) channel

Blades: 30° × 0.081" (2) thick J-style

Screen: 5/8" × 0.050" (15.9 × 1.3) expanded and flattened aluminum

Mullion: Visible

Minimum Size: 4.5" × 6" (114 × 152)

Maximum Size:

Single section: 60" × 120" (1524 × 3048)

120" × 60" (3048 × 1524)

Multiple section: Unlimited

Ratings

Free Area: [48" × 48" (1219 × 1219) unit]: 10.53 ft² (0.98 m²)
65.8%

Performance @ Beginning Point of Water Penetration

Free Area Velocity: 597 fpm (3.03 m/s)

Air Volume Delivered: 6,283 cfm (2.97 m³/s)

Pressure Loss: 0.03 in.wg. (8 Pa)

Velocity @ 0.15 in.wg. Pressure Loss: 1,342 fpm (6.82 m/s)

Design Load: 25 psf

Options

■ Factory finish:

- High Performance Fluoropolymer
- Baked Enamel ■ Prime Coat
- Clear Anodize ■ Integral Color Anodize

■ Frame options:

- 1-1/2" (38) flange frame ■ Custom-size flange
- Stucco flange ■ Glazing frame

■ Installation hardware

- Clip angles ■ Continuous angles

■ Hidden vertical mullion

■ Alternate bird or insect screens

■ Insulated or non-insulated blank-off panels

■ Filter racks

■ Hinged frame

■ Subframe

■ Head and/or sill flashing

■ Burglar bars

■ Frame closure

■ Net OD (actual size)



NOTE: Dimensions in parentheses () are millimeters.
Information is subject to change without notice or obligation.

PERFORMANCE

EFE-430-HP

Extruded Aluminum Louver
4" deep • 30° Exhaust


Free Area (ft²)

Free Area (ft ²)		Width (Inches)																			
		6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
Height (Inches)	6	0.04	0.1	0.2	0.2	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.3
	12	0.2	0.4	0.6	0.8	1.1	1.3	1.5	1.8	2.0	2.2	2.4	2.7	2.9	3.1	3.4	3.6	3.8	4.0	4.3	4.5
	18	0.3	0.7	1.2	1.6	2.1	2.5	3.0	3.4	3.9	4.3	4.7	5.2	5.6	6.1	6.5	7.0	7.4	7.9	8.3	8.7
	24	0.4	1.0	1.7	2.3	2.9	3.6	4.2	4.8	5.4	6.1	6.7	7.3	8.0	8.6	9.2	9.8	10.5	11.1	11.7	12.3
	30	0.5	1.3	2.2	3.0	3.8	4.6	5.4	6.2	7.0	7.8	8.6	9.4	10.3	11.1	11.9	12.7	13.5	14.3	15.1	15.9
	36	0.7	1.7	2.6	3.6	4.6	5.6	6.6	7.6	8.6	9.6	10.6	11.6	12.6	13.6	14.6	15.6	16.6	17.5	18.5	19.5
	42	0.8	2.0	3.2	4.4	5.6	6.8	7.9	9.1	10.3	11.5	12.7	13.9	15.1	16.3	17.5	18.7	19.9	21.0	22.2	23.4
	48	0.9	2.3	3.7	5.0	6.4	7.8	9.2	10.5	11.9	13.3	14.7	16.0	17.4	18.8	20.1	21.5	22.9	24.3	25.6	27.0
	54	1.0	2.6	4.1	5.6	7.2	8.7	10.3	11.8	13.3	14.9	16.4	18.0	19.5	21.0	22.6	24.1	25.6	27.2	28.7	30.3
	60	1.2	2.9	4.7	6.4	8.2	9.9	11.7	13.4	15.2	17.0	18.7	20.5	22.2	24.0	25.7	27.5	29.2	31.0	32.7	34.5
	66	1.3	3.2	5.2	7.1	9.0	11.0	12.9	14.9	16.8	18.7										
	72	1.4	3.5	5.7	7.8	9.9	12.0	14.1	16.2	18.4	20.5										
	78	1.5	3.8	6.1	8.4	10.7	13.0	15.4	17.7	20.0	22.3										
	84	1.7	4.2	6.7	9.2	11.7	14.2	16.7	19.2	21.7	24.2										
	90	1.8	4.5	7.2	9.8	12.5	15.2	17.9	20.6	23.3	25.9										
	96	1.9	4.7	7.6	10.4	13.3	16.1	19.0	21.8	24.7	27.5										
102	2.0	5.1	8.2	11.2	14.3	17.4	20.4	23.5	26.6	29.6											
108	2.2	5.4	8.7	11.9	15.2	18.4	21.6	24.9	28.1	31.4											
114	2.3	5.7	9.1	12.6	16.0	19.4	22.9	26.3	29.7	33.1											
120	2.4	6.0	9.6	13.2	16.9	20.5	24.1	27.7	31.3	34.9											


Water Penetration

AMCA defines the beginning point of water penetration as the free area velocity at the intersection of a simple linear regression of test data and the line of 0.01 ounces of water per square foot of free area measured through a 48" x 48" louver during a 15 minute period. The AMCA water penetration test provides a method for comparing louver models and designs as to their efficiency in resisting the penetration of rainfall under specific lab conditions. We recommend that intake louvers are selected with a reasonable margin of safety below the beginning point of water penetration in order to avoid unwanted penetration during severe storm conditions.

Beginning Point of Water Penetration = 597 fpm

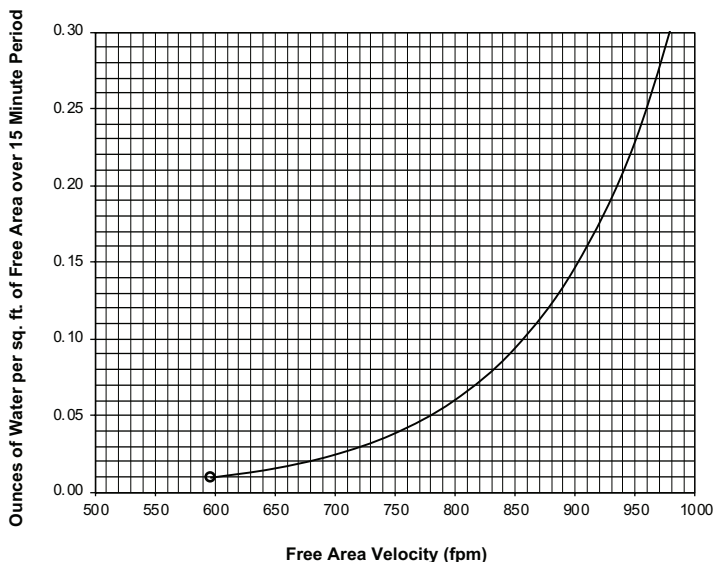


Pressure Loss

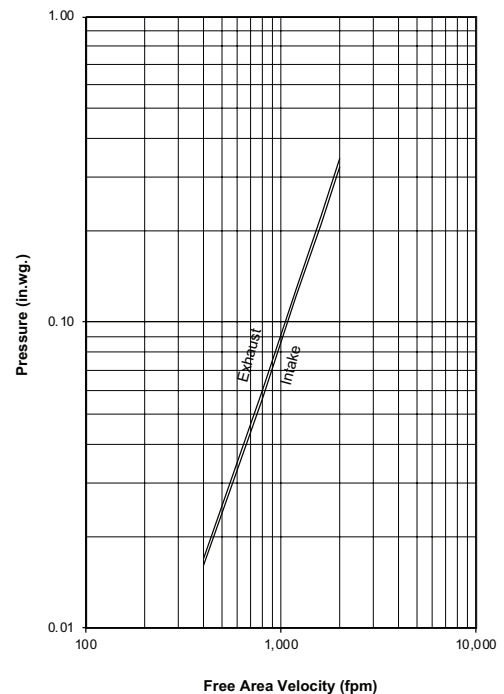

Louver Test Size = 48" x 48" (1219 x 1219)
Pressure loss tested in accordance with Figure 5.5 of AMCA Standard 500-L. Data corrected to standard air density.

Attributes

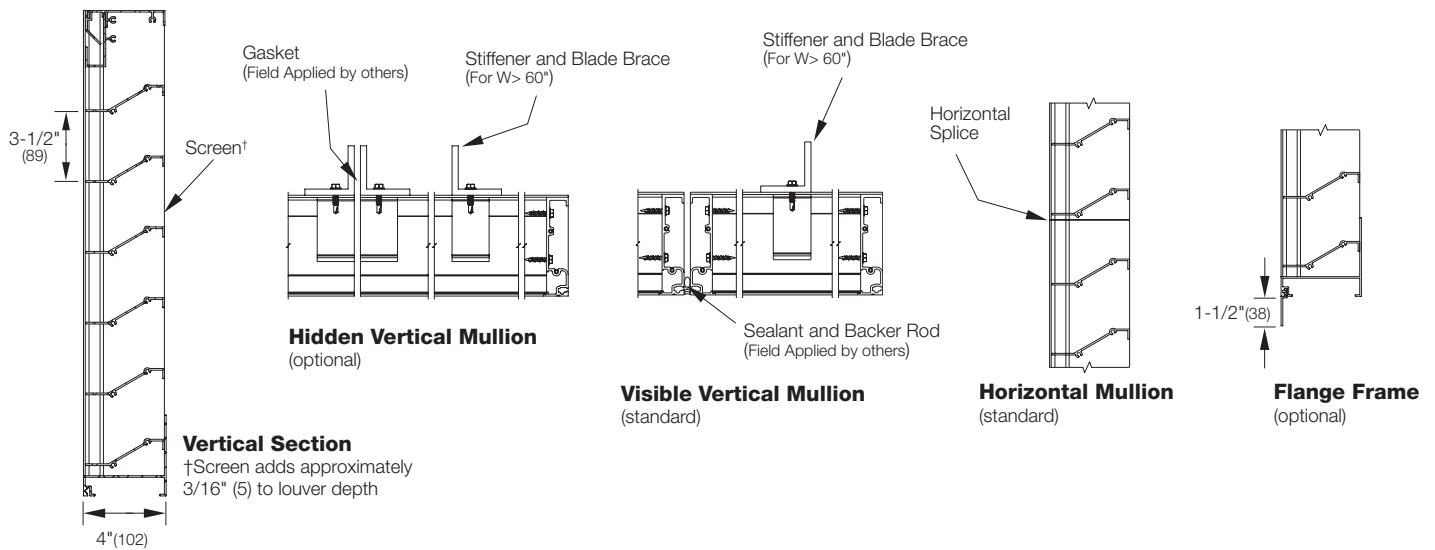

Supplemental Options

