

### EFJ-937-MD

(standard)

\*Louver dimensions furnished approximately 1/2" (13) undersize.

## Ratings

**Free Area:** [48" × 48" (1219 × 1219) unit]: 8.6 ft<sup>2</sup> (0.80m<sup>2</sup>)  
53.9%

### Performance @ Beginning Point of Water Penetration

**Free Area Velocity:** 1,250 fpm (6.35 m/s)

**Air Volume Delivered:** 10,775 cfm (5.09 m<sup>3</sup>/s)

**Pressure Loss:** 0.48 in.wg. (121 Pa)

**Velocity @ 0.15 in.wg. Pressure Loss:** 705 fpm (3.58 m/s)

**AMCA 540 (impact resistant) listed**

**AMCA 540 (high velocity rain resistant) listed**

**Miami Dade County:** NOA No. 21-0601.04 (Expires 5/17/2023)  
Approved to FBC TAS201-94, TAS202-94  
and TAS203-94

**Florida Building Code Approval (2020-FBC):** No. FL27578

**Texas Department of Insurance listed**

**Design Load:** 130 psf

The EFJ-937-MD dual-module louver is engineered and tested to withstand extreme loads, debris impact, and cyclic fatigue associated with the severe weather effects of hurricanes (Miami-Dade County approval #21-0601.04). The front (exterior) side of the louver features horizontal J-style blades for a pleasing architectural appearance. The back (interior) side has vertical chevron blades which provide superior resistance to wind-driven rain. For installation, the EFJ-937-MD offers multiple options requiring minimal hardware and assembly time. The EFJ-937-MD is AMCA 540 and 550 listed, making it ideally suited for use in hurricane-prone and wind-borne debris regions per the International Building Code.

## Standard Construction

**Material:** Mill finish extruded aluminum

**Frame:** 9" deep × 0.125" thick (232 × 3) channel

**Blades:** Front: 37° × 0.081" (2.1) thick horizontal J style  
Rear: 0.060" (1.5) thick vertical chevron.

**Screen:** 1/2" × 0.063" (12.7 × 1.6) expanded and flattened aluminum

**Mullion:** Visible

**Minimum Size:** 12" × 12" (305 × 305)

**Maximum Size:**

Single section: 60" × 120" (1524 × 3048)

Multiple section: Unlimited width × 120" (3048)

**Installation Hardware:** Standard continuous angles and associated fasteners (anchors to substrate by others refer to installation instructions)

## Options

### ■ Factory finish:

- High Performance Fluoropolymer ■ Prime Coat
- Baked Enamel ■ Clear Anodize ■ Integral Color Anodize

### ■ Frame Options:

- 1-1/2" (38) flange frame

### ■ Alternate bird or insect screens

### ■ Insulated or non-insulated blank-off panels

### ■ Filter racks

### ■ Head and/or sill flashing

### ■ Full sleeve and retaining angles (eliminates need for anchors to substrate; 1-1/2" (38) flange frame required)

### ■ Burglar bars



**NOTE:** Dimensions in parentheses ( ) are millimeters.  
Information is subject to change without notice or obligation.

# PERFORMANCE

## EFJ-937-MD

Extruded Aluminum Louver  
9" deep • 37-1/2° J-blade with vertical blade rear section

### Free Area (ft<sup>2</sup>)

Width (Inches)

	12	18	24	30	36	42	48	54	60
12	0.2	0.3	0.5	0.6	0.8	0.9	1.1	1.2	1.4
18	0.4	0.7	1.1	1.4	1.7	2.0	2.3	2.6	3.0
24	0.7	1.1	1.6	2.1	2.6	3.1	3.6	4.1	4.6
30	0.9	1.6	2.2	2.9	3.5	4.2	4.8	5.5	6.2
36	1.1	2.0	2.8	3.6	4.4	5.3	6.1	6.9	7.8
42	1.4	2.4	3.4	4.4	5.4	6.4	7.4	8.4	9.4
48	1.6	2.8	3.9	5.1	6.3	7.4	8.6	9.8	11.0
54	1.8	3.2	4.5	5.8	7.2	8.5	9.9	11.2	12.6
60	2.1	3.6	5.1	6.6	8.1	9.6	11.1	12.6	14.2
66	2.3	4.0	5.7	7.3	9.0	10.7	12.4	14.1	15.8
72	2.5	4.4	6.2	8.1	9.9	11.8	13.7	15.5	17.4
78	2.7	4.8	6.8	8.8	10.9	12.9	14.9	16.9	19.0
84	3.0	5.2	7.4	9.6	11.8	14.0	16.2	18.4	20.6
90	3.2	5.6	8.0	10.3	12.7	15.1	17.4	19.8	22.2
96	3.4	6.0	8.5	11.1	13.6	16.1	18.7	21.2	23.7
102	3.7	6.4	9.1	11.8	14.5	17.2	19.9	22.6	25.4
108	3.9	6.8	9.7	12.6	15.4	18.3	21.2	24.1	26.9
114	4.1	7.2	10.2	13.3	16.3	19.4	22.5	25.5	28.6
120	4.4	7.6	10.8	14.0	17.3	20.5	23.7	26.9	30.1

Height (Inches)



#### Certified Ratings:

All-Lite certifies that the model EFJ-937-MD shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to air performance, water penetration and wind-driven rain ratings.



#### HIGH VELOCITY RAIN RESISTANT AND IMPACT RESISTANT LOUVER *Enhanced Protection*

See [www.AMCA.org](http://www.AMCA.org) for all certified or listed products

This label does not signify  
AMCA airflow performance  
certification.


#### Certified Ratings:

All-Lite certifies that the model EFJ-937-MD shown herein is approved to bear the AMCA listing label. The ratings shown are based on tests and procedures performed in accordance with AMCA publications and comply with the requirements of the AMCA listing label program. The AMCA listing label applies to impact resistant louvers and high velocity rain resistant louvers.


## Water Penetration

AMCA defines the beginning point of water penetration as the free area velocity at the intersection of a simple linear regression of test data and the line of 0.01 ounces of water per square foot of free area measured through a 48" x 48" louver during a 15 minute period. The AMCA water penetration test provides a method for comparing louver models and designs as to their efficiency in resisting the penetration of rainfall under specific lab conditions. We recommend that intake louvers are selected with a reasonable margin of safety below the beginning point of water penetration in order to avoid unwanted penetration during severe storm conditions.

Beginning Point of Water Penetration = 1,250 fpm

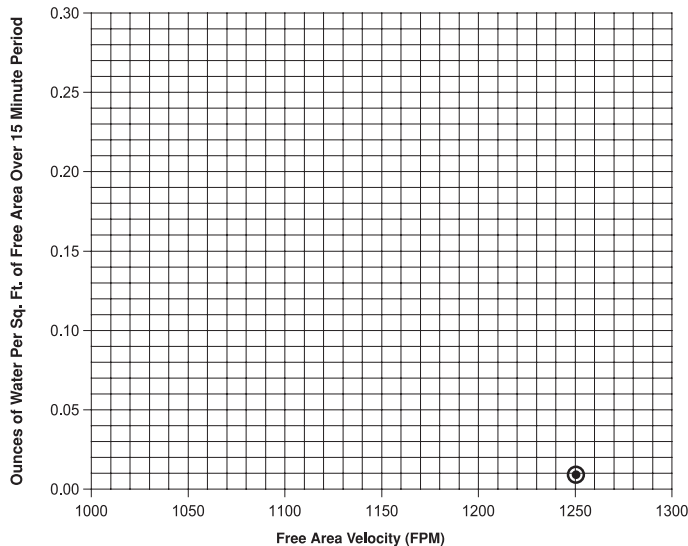

## Pressure Loss

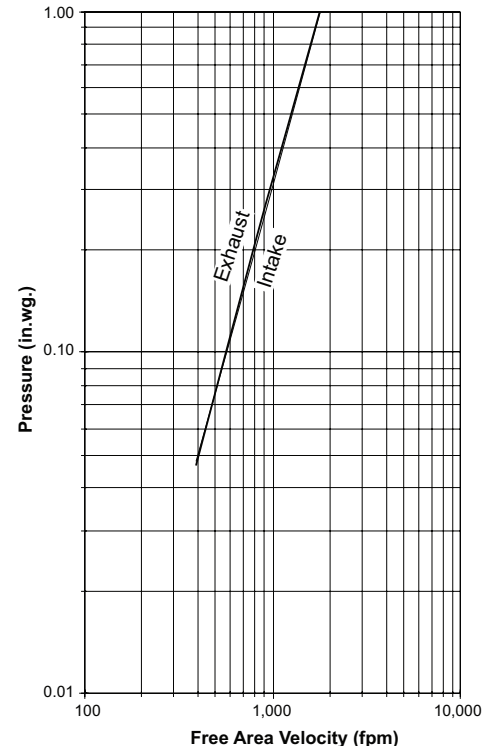

Louver Test Size = 48" x 48" (1219 x 1219)

Pressure loss tested in accordance with Figure 5.5 of AMCA Standard 500-L. Data corrected to standard air density.

# PERFORMANCE

## EFJ-937-MD

Extruded Aluminum Louver  
9" deep • 37-1/2° J-blade with vertical blade rear section

### Wind Driven Rain Performance - AMCA 500L Wind-Driven Rain Test

Wind Velocity	Rainfall	Airflow	Core Velocity <sup>1</sup>	Effectiveness Ratio	Wind-Driven Rain Penetration Class	Discharge Loss Class <sup>2</sup>
29 mph	3 in/hr	10,640 cfm	988 fpm	100%	A	3
50 mph	8 in/hr	9,599 cfm	892 fpm	99%	A	

#### NOTE:

1. Core area is the open area of the louver face (face area less louver frame). Core velocity is the airflow divided by core area. Test louver core area is 10.77 ft<sup>2</sup> (1 m<sup>2</sup>).

2. Discharge Loss Coefficient is calculated by dividing the louver's actual airflow rate by the theoretical airflow rate for an unobstructed opening. The higher the coefficient, the lower the resistance to airflow.


#### Wind Driven Rain

Class	Effectiveness
A	99% and above
B	95% to 98.9%
C	80% to 94.9%
D	below 80%

#### Discharge Loss


Class	Coefficient
1	0.4 and above
2	0.3 to 0.399
3	0.2 to 0.299
4	0.199 and below

## Attributes

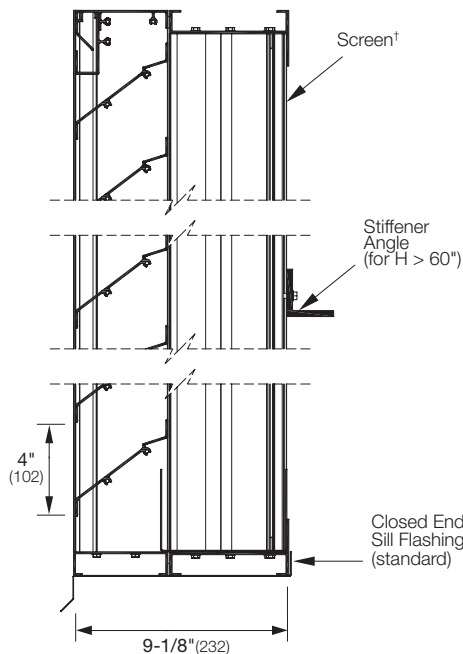


#### Vertical Section


†Screen adds approximately 3/16" (5) to louver depth

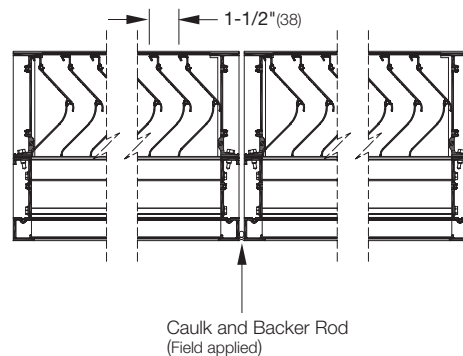

#### Visible Vertical Mullion (standard)



#### Flange Frame (optional)

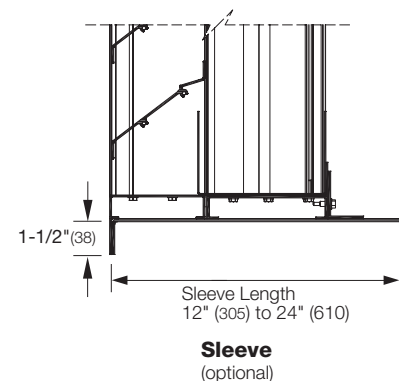


#### Sleeve (optional)

# Supplemental Options


## EFJ-937-MD

Extruded Aluminum Louver  
9" deep • 37-1/2° J-blade with vertical blade rear section

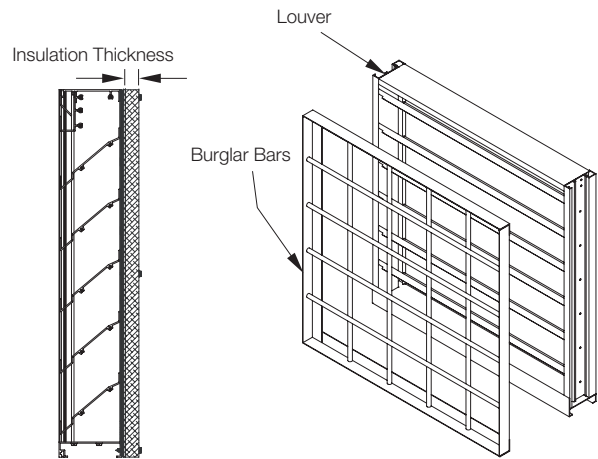


**Blank-Off Options**  
Non-Insulated and Gasketed  
1" Insulated (4.25 R-value)  
2" Insulated (8.75 R-value)

**Burglar Bars**  
Shipped Loose or Mounted

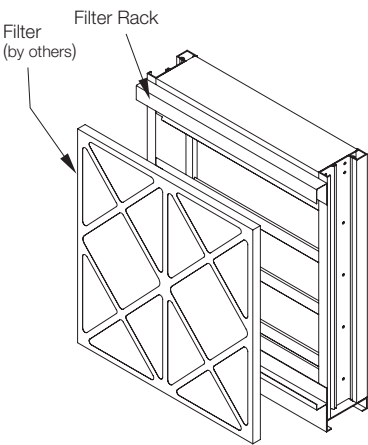

**Filter Rack**

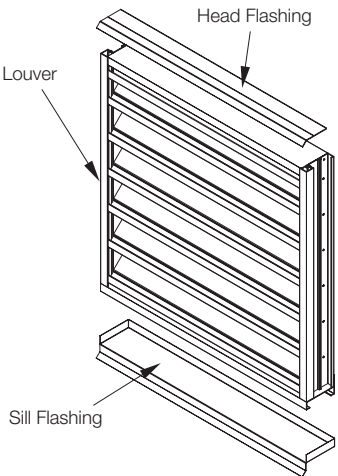

**Flashing Options**  
Head and Sill Available