


ALL-LITE

EFY-245

Extruded Aluminum Louver
2" deep • 45° Y-Blade

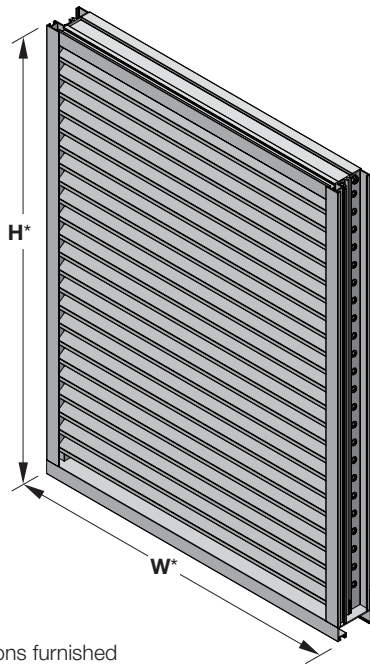

EFY-245

(standard)

*Louver dimensions furnished
approximately 1/2" (13) undersize.

The EFY-245 extruded aluminum louver is designed for intake and exhaust application where protection against water infiltration is not critical. The EFY-245 is well suited for special shape applications and is available with hidden mullions for a continuous blade appearance of multiple section assemblies. The EFY-245 is available in a wide array of anodized and painted finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum

Frame: 2" deep × 0.060" thick (51 × 1.5) channel

Blades: 45° × 0.060" (1.5) thick Y-style

Screen: 1/2" × 0.063" (12.7 × 1.6) expanded and flattened aluminum

Minimum Size: 4.5" × 4.5" (114 × 114)

Maximum Size:

Single section: 60" × 120" (1524 × 3048)
120" × 60" (3048 × 1524)

Multiple section: Unlimited

Ratings

Free Area: [48" × 48" (1219 × 1219) unit]: 9.0 ft² (0.83 m²)
56.0%

Performance @ Beginning Point of Water Penetration

Free Area Velocity: 289 fpm (1.47 m/s)

Air Volume Delivered: 2,593 cfm (1.22 m³/s)

Pressure Loss: 0.04 in.wg. (10 Pa)

Velocity @ 0.15 in. wg. Pressure Loss: 571 fpm (2.90 m/s)

Options

■ Factory finish:

- High Performance Fluoropolymer
- Prime Coat
- Baked Enamel
- Clear Anodize
- Integral Color Anodize

■ Frame Options:

- 1-1/2" (38) flange frame
- Custom-size flange frame
- Stucco flange
- Glazing frame

■ Installation Hardware

- Clip angles
- Continuous angles

■ Hidden Vertical Mullion

■ Welded construction

■ Alternate bird or insect screens

■ Insulated or non-insulated blank-off panels

■ Filter racks

■ Hinged frame

■ Subframe

■ Head and/or sill flashing

■ Burglar bars

■ Frame closure

■ Net OD (actual size)

5 year
warranty

NOTE: Dimensions in parentheses () are millimeters.
Information is subject to change without notice or obligation.

PERFORMANCE

EFY-245

Extruded Aluminum Louver
2" deep • 45° Y-Blade


Free Area (ft²)

		Width (Inches)																				
		6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	
Height (Inches)	6	0.1	0.1	0.2	0.3	0.4	0.5	0.5	0.6	0.7	0.8	0.9	0.9	1.0	1.1	1.2	1.3	1.3	1.4	1.5	1.6	
	12	0.2	0.4	0.6	0.9	1.1	1.3	1.5	1.8	2.0	2.2	2.4	2.6	2.8	3.1	3.3	3.5	3.7	4.0	4.2	4.4	
	18	0.3	0.7	1.1	1.4	1.8	2.2	2.6	3.0	3.4	3.7	4.0	4.4	4.8	5.2	5.6	6.0	6.3	6.7	7.1	7.5	
	24	0.4	0.9	1.5	2.0	2.6	3.1	3.7	4.2	4.7	5.3	5.7	6.2	6.8	7.3	7.9	8.4	8.9	9.5	10.0	10.6	
	30	0.5	1.2	1.9	2.6	3.3	3.9	4.6	5.3	6.0	6.7	7.2	7.9	8.6	9.3	10.0	10.6	11.3	12.0	12.7	13.4	
	36	0.6	1.5	2.3	3.2	4.0	4.9	5.7	6.5	7.4	8.2	8.9	9.7	10.6	11.4	12.2	13.1	13.9	14.8	15.6	16.5	
	42	0.8	1.8	2.8	3.8	4.8	5.8	6.8	7.8	8.8	9.8	10.5	11.5	12.5	13.5	14.5	15.5	16.5	17.5	18.5	19.5	
	48	0.9	2.0	3.2	4.3	5.5	6.6	7.8	9.0	10.1	11.3	12.1	13.3	14.4	15.6	16.8	17.9	19.1	20.2	21.4	22.5	
	54	1.0	2.3	3.6	4.9	6.2	7.5	8.8	10.1	11.4	12.7	13.7	15.0	16.3	17.6	18.9	20.2	21.5	22.8	24.1	25.4	
	60	1.1	2.6	4.0	5.5	6.9	8.4	9.9	11.3	12.8	14.2	15.3	16.8	18.3	19.7	21.2	22.6	24.1	25.6	27.0	28.5	
	66	1.2	2.8	4.4	6.1	7.7	9.3	10.9	12.5	14.1	15.8											
	72	1.3	3.1	4.8	6.6	8.4	10.1	11.9	13.7	15.4	17.2											
	78	1.4	3.4	5.3	7.2	9.1	11.0	13.0	14.9	16.8	18.7											
	84	1.6	3.6	5.7	7.8	9.9	11.9	14.0	16.1	18.2	20.2											
	90	1.7	3.9	6.1	8.3	10.6	12.8	15.0	17.2	19.5	21.7											
	96	1.8	4.2	6.5	8.9	11.3	13.7	16.1	18.4	20.8	23.2											
102	1.9	4.4	7.0	9.5	12.0	14.6	17.1	19.7	22.2	24.7												
108	2.0	4.7	7.4	10.1	12.7	15.4	18.1	20.8	23.5	26.2												
114	2.1	5.0	7.8	10.7	13.5	16.3	19.2	22.0	24.9	27.7												
120	2.2	5.2	8.2	11.2	14.2	17.2	20.2	23.2	26.2	29.2												


Water Penetration

AMCA defines the beginning point of water penetration as the free area velocity at the intersection of a simple linear regression of test data and the line of 0.01 ounces of water per square foot of free area and is measured through a 48" x 48" louver during a 15 minute period. The AMCA water penetration test provides a method for comparing louver models and designs as to their efficiency in resisting the penetration of rainfall under specific lab conditions. We recommend that intake louvers are selected with a reasonable margin of safety below the beginning point of water penetration in order to avoid unwanted penetration during severe storm conditions.

Beginning Point of Water Penetration = 289 fpm

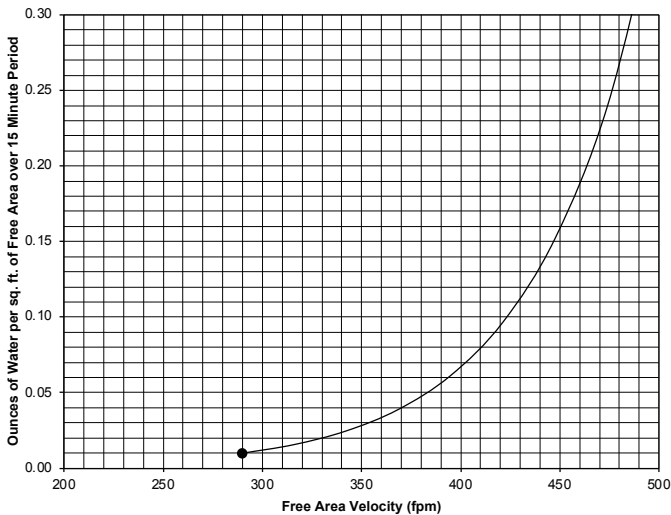

Pressure Loss

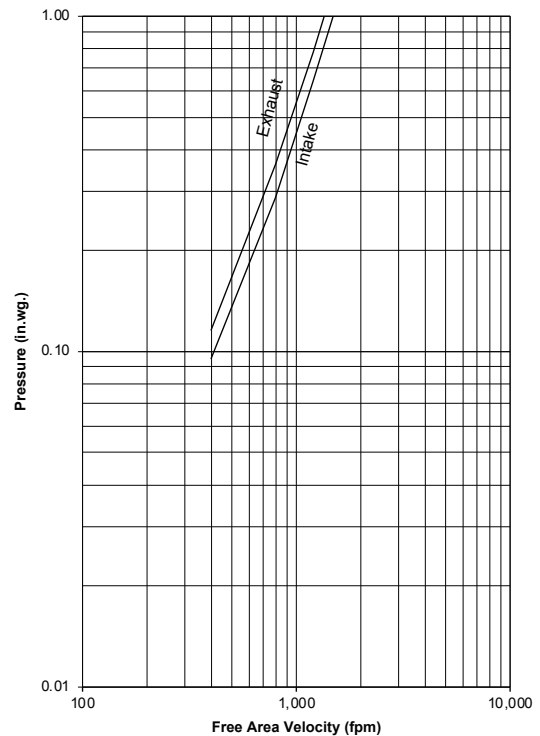


Louver Test Size = 48" x 48" (1219 x 1219)
Pressure loss tested in accordance with Figure 5.5 of AMCA Standard 500-L. Data corrected to standard air density.

EFY-245

Extruded Aluminum Louver
2" deep • 45° Y-Blade

Attributes

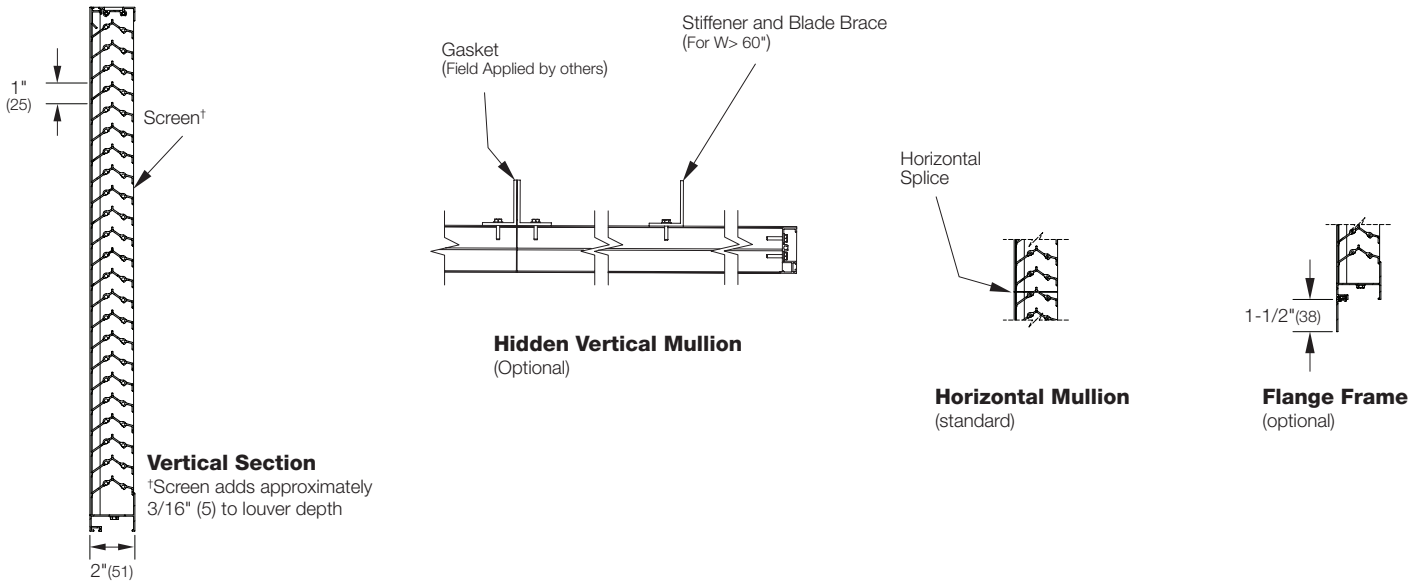

Supplemental Options

