

Application

The EVS-422 offers exceptional protection against wind-driven sand and is ideally suited for high wind areas or applications that are sensitive to wind-driven sand penetration. The EVS-422 is available in a wide array of anodized and painted finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum.

Frame: 4" deep × 0.081" thick (102 × 2) channel.

Blades: 22° × 0.081" (2) thick vertical style.

Screen: 1/2" × 0.063" (12.7 × 1.6) expanded and flattened aluminum.

Mullion: Visible.

Minimum Size: 12" × 12" (305 × 305)

Maximum Size: Single section: 60" × 120" (1524 × 3048)
 120" × 60" (3048 × 1524)
 Multiple section: Unlimited

Options

- Factory finish:
 - High Performance Fluoropolymer - 100% resin Newlar®/ 70% resin Kynar®
 - Baked Enamel/Polyester
 - Clear or Color Anodized, Class 1
 - Prime Coat
- 1 1/2" (38) flange frame.
- Welded construction.
- Alternate bird or insect screens.
- Insulated or non-insulated blank-off panels.
- Filter racks.
- Hinged frame.
- Head and/or sill flashing.

Ratings

Free Area: [48" × 48" (1219 × 1219) unit]: 2.5 ft² (0.26 m²)
 15.6%

Performance @ Beginning Point of Water Penetration


Free Area Velocity: 1,250 fpm (6.35 m/s)

Air Volume Delivered: 3,125 cfm (1.48 m³/s)

Pressure Loss: 1.00 in.wg. (249 Pa)

Velocity @ 0.15 in.wg. Pressure Loss: 700 fpm (3.56 m/s)


Design Load: 30 psf

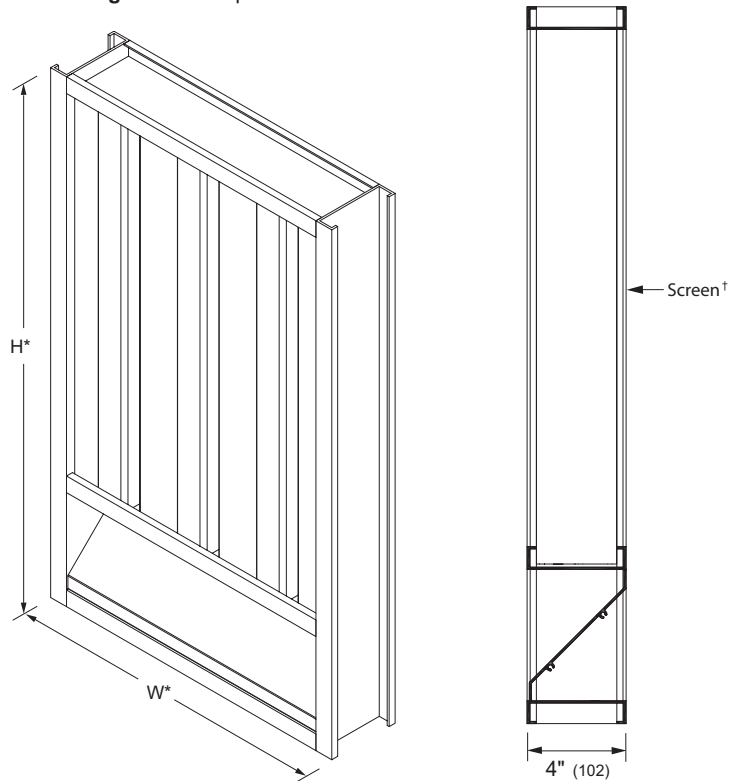

Model **EVS-422**
 (standard)


*Louver dimensions furnished approximately 1/2" (13) undersize.

Vertical Section
 †Screen adds approximately 3/16" (5) to louver depth.




Horizontal Section


Mullion Cover
 (supplied loose for field installation)



Horizontal Mullion
 (standard)



Vertical Mullion
 (standard)



Flange Frame
 (optional)

Information is subject to change without notice or obligation.


NOTE: Dimensions in parentheses () are millimeters.

Performance Data

Free Area (ft²)

| | | Width (Inches) | | | | | | | | | | | | | | | | | | |
|-----------------|-----|----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|
| | | 12 | 18 | 24 | 30 | 36 | 42 | 48 | 54 | 60 | 66 | 72 | 78 | 84 | 90 | 96 | 102 | 108 | 114 | 120 |
| Height (Inches) | 12 | 0.1 | 0.1 | 0.2 | 0.3 | 0.3 | 0.4 | 0.5 | 0.6 | 0.6 | 0.7 | 0.8 | 0.9 | 0.9 | 1.0 | 1.1 | 1.2 | 1.2 | 1.3 | 1.4 |
| | 18 | 0.1 | 0.2 | 0.3 | 0.5 | 0.6 | 0.7 | 0.8 | 1.0 | 1.1 | 1.2 | 1.3 | 1.5 | 1.6 | 1.7 | 1.8 | 2.0 | 2.1 | 2.2 | 2.3 |
| | 24 | 0.1 | 0.3 | 0.5 | 0.6 | 0.8 | 1.0 | 1.2 | 1.3 | 1.5 | 1.7 | 1.9 | 2.0 | 2.2 | 2.4 | 2.6 | 2.7 | 2.9 | 3.1 | 3.3 |
| | 30 | 0.1 | 0.4 | 0.6 | 0.8 | 1.0 | 1.3 | 1.5 | 1.7 | 1.9 | 2.2 | 2.4 | 2.6 | 2.8 | 3.1 | 3.3 | 3.5 | 3.7 | 4.0 | 4.2 |
| | 36 | 0.2 | 0.4 | 0.7 | 1.0 | 1.3 | 1.5 | 1.8 | 2.1 | 2.4 | 2.6 | 2.9 | 3.2 | 3.5 | 3.7 | 4.0 | 4.3 | 4.6 | 4.8 | 5.1 |
| | 42 | 0.2 | 0.5 | 0.8 | 1.2 | 1.5 | 1.8 | 2.1 | 2.5 | 2.8 | 3.1 | 3.4 | 3.8 | 4.1 | 4.4 | 4.7 | 5.1 | 5.4 | 5.7 | 6.0 |
| | 48 | 0.2 | 0.6 | 1.0 | 1.4 | 1.7 | 2.1 | 2.5 | 2.9 | 3.2 | 3.6 | 4.0 | 4.4 | 4.7 | 5.1 | 5.5 | 5.9 | 6.2 | 6.6 | 7.0 |
| | 54 | 0.3 | 0.7 | 1.1 | 1.5 | 2.0 | 2.4 | 2.8 | 3.2 | 3.7 | 4.1 | 4.5 | 4.9 | 5.4 | 5.8 | 6.2 | 6.6 | 7.1 | 7.5 | 7.9 |
| | 60 | 0.3 | 0.8 | 1.2 | 1.7 | 2.2 | 2.7 | 3.1 | 3.6 | 4.1 | 4.6 | 5.0 | 5.5 | 6.0 | 6.5 | 6.9 | 7.4 | 7.9 | 8.4 | 8.8 |
| | 66 | 0.3 | 0.8 | 1.4 | 1.9 | 2.4 | 2.9 | 3.5 | 4.0 | 4.5 | 5.0 | 5.6 | 6.1 | 6.6 | 7.1 | 7.7 | 8.2 | 8.7 | 9.2 | 9.8 |
| | 72 | 0.4 | 0.9 | 1.5 | 2.1 | 2.7 | 3.2 | 3.8 | 4.4 | 5.0 | 5.5 | 6.1 | 6.7 | 7.3 | 7.8 | 8.4 | 9.0 | 9.6 | 10.1 | 10.7 |
| | 78 | 0.4 | 1.0 | 1.6 | 2.3 | 2.9 | 3.5 | 4.1 | 4.8 | 5.4 | 6.0 | 6.6 | 7.3 | 7.9 | 8.5 | 9.1 | 9.8 | 10.4 | 11.0 | 11.6 |
| | 84 | 0.4 | 1.1 | 1.8 | 2.4 | 3.1 | 3.8 | 4.5 | 5.1 | 5.8 | 6.5 | 7.2 | 7.8 | 8.5 | 9.2 | 9.9 | 10.5 | 11.2 | 11.9 | 12.6 |
| | 90 | 0.4 | 1.2 | 1.9 | 2.6 | 3.3 | 4.1 | 4.8 | 5.5 | 6.2 | 7.0 | 7.7 | 8.4 | 9.1 | 9.9 | 10.6 | 11.3 | 12.0 | 12.8 | 13.5 |
| | 96 | 0.5 | 1.2 | 2.0 | 2.8 | 3.6 | 4.3 | 5.1 | 5.9 | 6.7 | 7.4 | 8.2 | 9.0 | 9.8 | 10.5 | 11.3 | 12.1 | 12.9 | 13.6 | 14.4 |
| | 102 | 0.5 | 1.3 | 2.2 | 3.0 | 3.8 | 4.6 | 5.5 | 6.3 | 7.1 | 7.9 | 8.8 | 9.6 | 10.4 | 11.2 | 12.1 | 12.9 | 13.7 | 14.5 | 15.4 |
| 108 | 0.5 | 1.4 | 2.3 | 3.2 | 4.0 | 4.9 | 5.8 | 6.7 | 7.5 | 8.4 | 9.3 | 10.2 | 11.0 | 11.9 | 12.8 | 13.7 | 14.5 | 15.4 | 16.3 | |
| 114 | 0.6 | 1.5 | 2.4 | 3.3 | 4.3 | 5.2 | 6.1 | 7.0 | 8.0 | 8.9 | 9.8 | 10.7 | 11.7 | 12.6 | 13.5 | 14.4 | 15.4 | 16.3 | 17.2 | |
| 120 | 0.6 | 1.6 | 2.5 | 3.5 | 4.5 | 5.5 | 6.4 | 7.4 | 8.4 | 9.4 | 10.3 | 11.3 | 12.3 | 13.3 | 14.2 | 15.2 | 16.2 | 17.2 | 18.1 | |

Pressure Loss

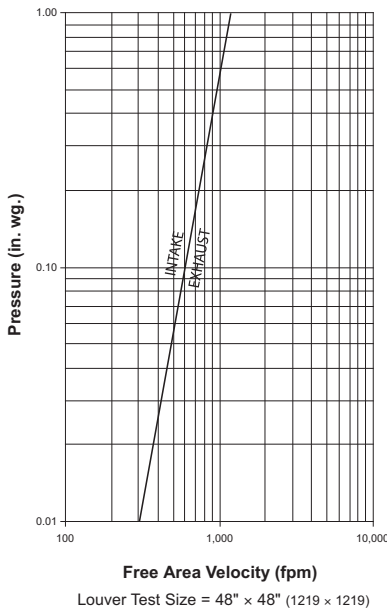

Selection Criteria

Follow the steps listed below to calculate the louver size needed to satisfy the required air volume while minimizing the adverse effects of water penetration and pressure loss.

1. Determine the Free Area Velocity (FAV) at the maximum allowable pressure loss using the *Pressure Loss* chart to the left. While job conditions vary, typically, the maximum allowable pressure loss should not exceed 0.15 in.wg., and the FAV for 0.15 in.wg. pressure loss is listed on the front page of this sheet.
2. **Intake Applications** If the FAV at the Beginning Point of Water Penetration (shown below) is less than the FAV from step 1, then use the FAV at the Beginning Point of Water Penetration in step 3, otherwise use the FAV from step 1.
- Exhaust Applications** Use the FAV from step 1 in step 3.
3. Calculate the total louver square footage required using the following equation.

$$\frac{\text{Required Air Volume}}{\text{cfm}} \div \frac{\text{FAV}}{\text{fpm}} = \frac{\text{Required Louver (Free-Area) Size}}{\text{ft}^2}$$

4. Using the *Free Area* chart above, select a louver width and height that yields a free area ft² greater than or equal to the required louver size calculated in step 3.

Sand Removal Efficiency

