

Application

The HT-401 equipment screen incorporates a horizontal step-blade to match common building cladding systems and screen equipment from line-of-sight. The HT-401 is available in a wide array of finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum.

Frame: 1 1/2" x 0.081" thick (38 x 2) plate.

Blades: 0.081" (2) thick airfoil tube style.

Mullion: Concealed.

Minimum Size: 12" x 12" (305 x 305).


Maximum Size: Single section: 72" x 144" (1829 x 3658).
 144" x 72" (3658 x 1829).
 Multiple section: Unlimited

Options

- Factory finish:
 - High Performance Fluoropolymer - 100% resin Newlar®/70% resin Kynar®
 - Baked Enamel
 - Clear or Color Anodized, Class 1
 - Prime Coat
- Welded construction.
- Hinged frame.

Ratings

Free Area: [48" x 48" (1219 x 1219) unit]: 9.6 ft² (0.89 m²)
 60.0%

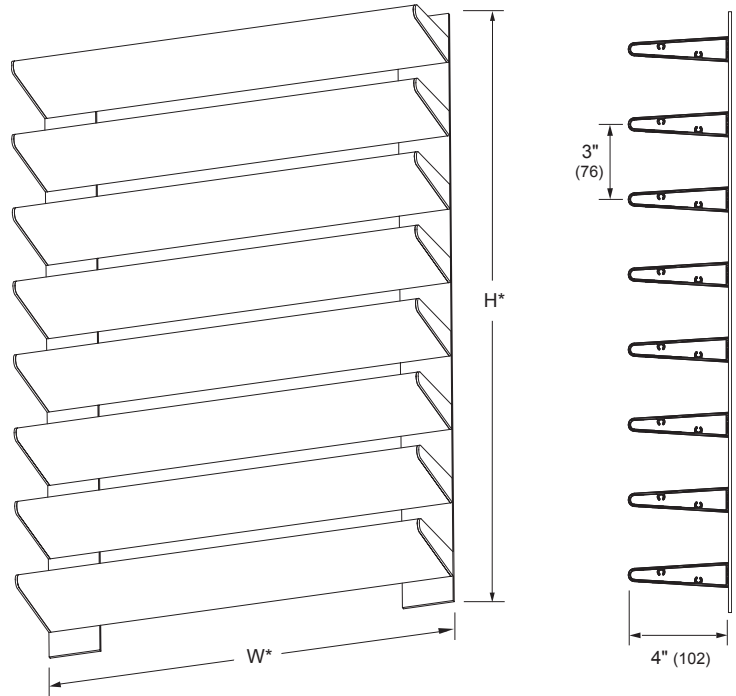


Model HT-401


(standard)

*Dimensions furnished
 approximately 1/2" (13) undersize.

Vertical Section



Vertical Mullion
 (standard)



Horizontal Mullion
 (standard)