

The HJ-645 inverted louver blade equipment screen provides an effective and attractive sight screen around equipment and is designed for both interior and exterior installations. The HJ-645 is available in a wide array of finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum

Frame: 3-1/4" × 1-1/2" × 1/8" thick (83 × 38 × 3) zee support

Blades: 45° × 0.081" (2) thick J-style

Minimum Size: 20" × 12" (508 × 305)

Maximum Size: Single section: 60" × 120" (1524 × 3048)

120" × 60" (3048 × 1524)

Multiple section: Unlimited width × 120" (3048)

Options

■ Factory finish:

- Clear Anodize
- Baked Enamel
- High Performance Fluoropolymer
- Integral Color Anodize

■ Heavy duty 0.125" (3) construction

■ Hinged frame

■ Subframe

■ Custom sections


■ Miter corner (see back page for details)

■ Design Load: 60 psf


Ratings

Free Area: [48" × 48" (1219 × 1219) unit]: 7.8 ft² (0.73 m²)
48.9%

Design Load: 30 psf

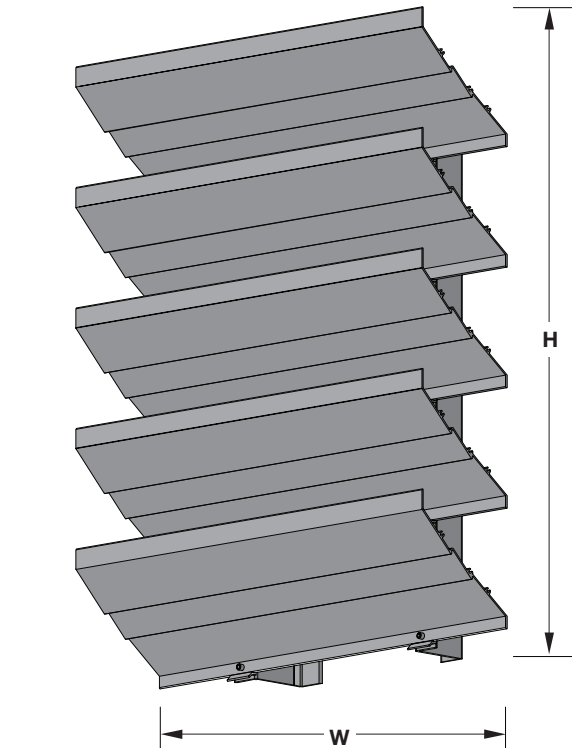

HJ-645
(standard)

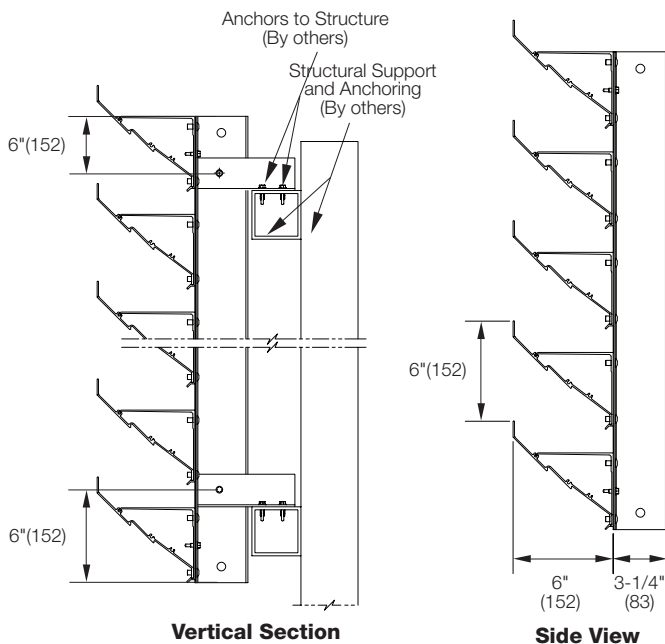

NOTE: Dimensions in parentheses () are millimeters.
Information is subject to change without notice or obligation.

Plan View

HJ-645

Extruded Aluminum Sight Screen
6" deep • 45° Horizontal Inverted J-Blade

